


S8208

8-port Unmanaged Multi-Giga Switch

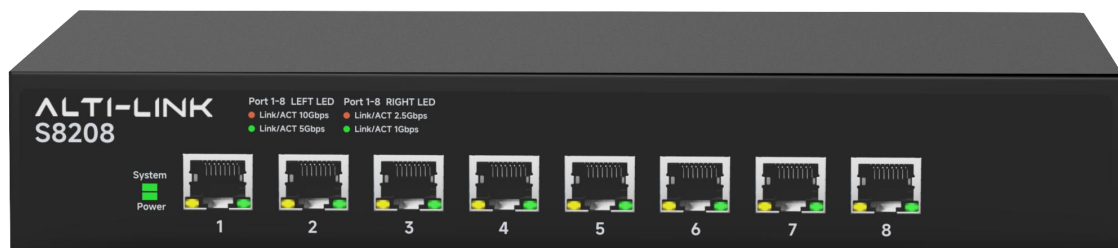

## General Description

S8208 unmanaged switches have 8x 10G Copper ports and adopt store-and-forward mode to provide stable and reliable data transmission.

## Specification

<b>Interface</b>	
<b>Fixed port</b>	8*1000/10000 Base
<b>Power interface</b>	1*AC Interface
<b>LED Indicators</b>	PWR, SYS, Link/ACT LED
<b>IGMP Snooping</b>	Customized
<b>Electrical Specifications</b>	
<b>input voltage</b>	AC 100-240V 50/60Hz
<b>Total Power consumption</b>	≤35W
<b>Layer 2 Switching</b>	
<b>Switching capacity</b>	160G
<b>Packet forwarding rate</b>	119.04Mpps
<b>MAC address table</b>	16K
<b>Buffer</b>	12M bit
<b>Forwarding delay</b>	<10us
<b>MDX/MIDX</b>	Supported
<b>Jumbo frame</b>	16KByte
<b>Environment</b>	
<b>Temperature</b>	Operating temperature: 0°C to 45°C Storage temperature: -40°C to 70°C
<b>Relative humidity</b>	Operating humidity: 10% to 90% RH Storage humidity: 5% to 90% RH
<b>Thermal methods</b>	FAN
<b>MTBF</b>	100, 000 Hours
<b>Mechanical Dimensions</b>	
<b>Size</b>	270*171*44mm
<b>Installation Method</b>	Desktop
<b>Weight</b>	1.32KG

EMC&INGRESS PROTECTION	
Surge protection of Power	Common mode 6KV, differential mode 2KV
Surge protection of Ethernet port	Common mode 4KV, differential mode 2KV
ESD	Contact 8K, Air 15K
Free fall	0.5M

# ALTI-LINK

**ALTI-LINK COMMUNICATION CO., LIMITED**

Room 310, Building 4, Dongjiu Innovation Technology Park,

No#76 Bulan Road, 518057,Shenzhen, P.R.China

Email: [inquiry@alti-link.com](mailto:inquiry@alti-link.com)

*Copyright ©2014~2024 Alti-link All Rights Reserved.Specifications are subject to change without notice.*