


S7208

8-ports 10G Base-X Unmanaged Switch

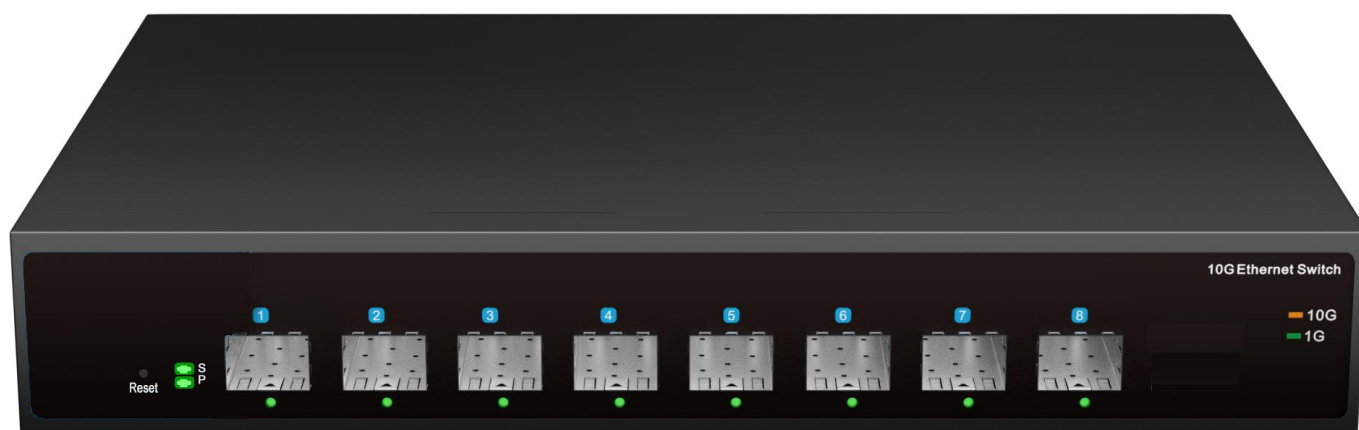

## General Description

S7208X unmanaged switches have 8x 10G optical ports and adopt store-and-forward mode to provide stable and reliable data transmission.

### Specification

Interface	
Fixed port	8*1000/10000 Base - X
Power interface	1*AC Interface
LED Indicators	PWR, SYS, Link/ACT LED
Optical fiber interface	SFP
Cable type&Transmission distance	
Monomode optical fiber	20/40/60/80/100KM

<b>Multimode optical fibre</b>	550M
<b>IGMP Snooping</b>	Customized
<b>Electrical Specifications</b>	
<b>input voltage</b>	AC 100-240V 50/60Hz
<b>Total Power consumption</b>	≤35W
<b>Layer 2 Switching</b>	
<b>Switching capacity</b>	160G
<b>Packet forwarding rate</b>	119.04Mpps
<b>MAC address table</b>	16K
<b>Buffer</b>	12M bit
<b>Forwarding delay</b>	<10us
<b>MDX/MIDX</b>	Supported
<b>Jumbo frame</b>	10KByte
<b>Environment</b>	
<b>Temperature</b>	Operating temperature: -10°C to 55°C Storage temperature: -40°C to 70°C
<b>Relative humidity</b>	Operating humidity: 10% to 90% RH Storage humidity: 5% to 90% RH
<b>Thermal methods</b>	FAN
<b>MTBF</b>	100, 000 Hours
<b>Mechanical Dimensions</b>	
<b>Size</b>	270*171*44mm
<b>Installation Method</b>	Desktop
<b>Weight</b>	1.25KG
<b>EMC&amp;INGRESS PROTECTION</b>	
<b>Surge protection of Power</b>	Common mode 4KV, differential mode 2KV
<b>Surge protection of Ethernet port</b>	Common mode 6KV, differential mode 2KV
<b>ESD</b>	Contact 8K, Air 15K
<b>Free fall</b>	0.5M



**ALTI-LINK COMMUNICATION CO., LIMITED**

Room 310, Building 4, Dongjiu Innovation Technology Park,

No#76 Bulan Road, 518057, Shenzhen, P.R.China

Email: [inquiry@alti-link.com](mailto:inquiry@alti-link.com)

*Copyright ©2014~2024 Alti-link All Rights Reserved.Specifications are subject to change without notice.*